



#### M1-1-No Camera 75" 4K TOUCH INTERACTIVE SMART

#### Key Features


- **Stunning Visuals:** 4K Ultra HD (3840x2160p) display with 4mm physical tempered anti-riot glassto strengthen the visual effect and enhance the touch experience
- All-in-one design: The system integrates various features of different machines, including a built-in screen projection, electronic whiteboard, annotation, split screens, etc
- Beautiful Layout: The device has an aluminum alloy outer frame that is surface sandblasted and anodized. It also has an iron shell back cover and active heat dissipation.
- **Smooth Touching:** The device uses high-speed 20-point infrared touch technology, which provides a better writing experience, smoothness, and faster writing speed
- **BEHEARD:** The device has built-in 8 arrays microphones with echo cancellation and noise reduction technology, allowing for effective communication.
- **Dual System support:** The device has an international standard OPS slot, which allows for easy upgrading and maintenance.
- **Rich Expansion**: The device has abundant front expansion, which allows for convenient connectivity of all your devices.
- **PEACE OF MIND:** The device comes with an industry-leading 1-year standard warranty, with 24-hour professional after-sales services and technical team support.










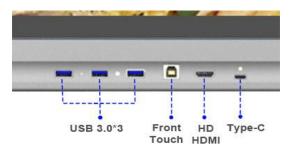





#### Product **Description**

The M2 series interactive smart board is an advanced tool for modern classrooms, with an all-in-one design that integrates features like built-in screen projection, electronic whiteboard, annotation, and split screens. The 4K Ultra HD display with tempered glass and smooth touch technology offers an immersive and engaging learning experience for students. Teachers can explain complex concepts, annotate diagrams, and share educational videos with ease. The M2 series also features built-in microphones with noise reduction technology, allowing for effective communication. Upgrading and maintenance is made easy with its international standard OPS slot.


The M2 series is a powerful and reliable tool for enhancing the education experience.

## Product **Specifications**


Basic Parameter		
Screen Size	75 inch	
Display Area	1646*925.5	
Physical (mm)	1708.2*1013.8*120.1	
Packaging (mm)	1846*215*1180	
Net Weight (kg)	54	
Gross Weight (kg)	68.5	
LCD Panel		
Panel Brand	BOE brand new gauge A screen (LG、CSOT、AUO Optional )	
Panel Type	TFT-LCD S-PVA	
Screen Ratio	16: 9	
Brightness	300-350 cd/ $m^2$ (Brightness can be customized)	
Ratio Contrast	1200:1	
Visual Angle	178°/178°	
Respond Time	8ms	
Color Gamut (NTSC)	72%	
Backlight	WLED	
Life	>60000H	
The Speaker	2×8 \( \sigma /8W \) (built in)	
Resolution	3840 × 2160 (UHD) @60hz, 4K UHD screen	
Infrared Touch Characteristic		
Touch Type	Infrared Touch frame	
Touch Point	20 Touch Points	
Glass	4mm tempered glass	
Touch Strength	Zero pressure touch	
Respond Time	<8ms	
Induction Life	6 million times	

The Interface Definition	USB 2.0(Full speed)	
The Light Resistance	It has light resistance	
Positional Accuracy	More than 90% of the touch area is 2mm	
Number of Infrared Induction Lines (W x D)	32767 × 32767	
The Power Supply Model	Full duplex usb-powered DC +5V up to 500mA	
Glass Transmittance	> 88% (higher transmittance depends on glass surface treatment technology such as AR/AG)	
Motherboard / Android System		
Model	CVTE-T982	
Processor	T982-N0DN	
Input Port	RJ45 IN, RJ45 OUT, PC AUDIO, LINE OUT, OPTICAL OUT, RS232, USB 2.0, HDMI *2, TOUCH OUT, USB 3.0*2	
Audio	480i, 480p, 720p, 1080i, 1080p, 2160P	
System Version	Android 7.0/8.0/9.0 version (Android 10 11 Optional)	
RAM	3G RAM (1G/ 2G /4G /8G Optional)	
ROM	32G ROM (8G / 16G/ 32G/ 64G Optional)	
Switching Power Supply		
Power Consumption (Typical Value)	AC100-240V~(+/-10%),50/60Hz	
Stand By Power Consumption	≤ 0.5W	
The Power Interface	≤ 330W	
Switching Power Supply	European standard 220V two - phase three - wire system	
The environment		
Working Temperature	0℃~50℃	
Storage Temperature	-20℃~60℃	
<b>Working Humidity</b>	20%~80%(No condensation)	
Store Humidity	10%~90%(No condensation)	
Display Mode	S-ips, often black display, transmission	
Maximum Service Time	24 hours	
OPS (Dual System)		
System Version	Android 7/8/10/11 and other version for option	
Processor	Intel core i3/i5/i7 option	
Graphic Board	Core HD Graphics 3000	
Main Frequency	2.4GHz	
Memory	Memory 4G/8G/16G option	
Hard disc	128G/256G/512G/1T option	

#### **Product Customization**

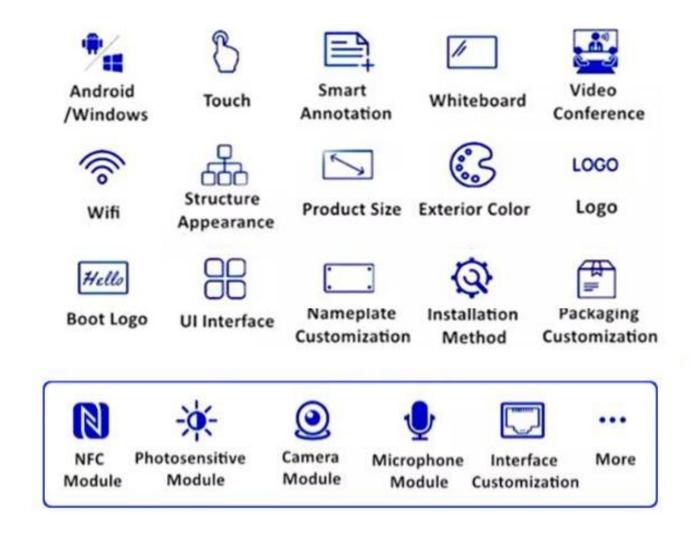

## Optional Content

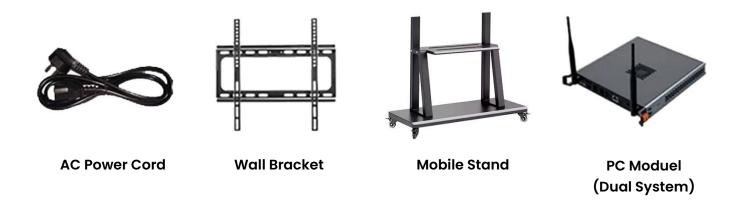

# Package Content









**Interactive Board** 

Instruction









**Crown Box** 



**Wooden Box** 



**Contact Sales** 

## **Devin He**

Phone: +86 18928337820 Whatsapp: +86 18928337820 Email: Devin@giiking.com Latest News: Giiking.shop Official Website: Giiking.com Alibaba: Giiking.alibaba